August International Ltd
United Kingdom
Telephone: +44 (0) 845 250 0586
Email: service@augustint.com
Web: www.augustint.com

# August® User Manual

**Laser Pointer & Remote Mouse Presenter with Timer**

**Présentateur Pointeur Laser Sans Fil avec Souris & Minuterie**

**Laserpointer & Funkmaus mit Alarmfunktion**

**Puntatore Laser per presentazioni & Telecomando con funzione mouse e timer**

**Puntero Laser Inalámbrico para Presentaciones con Ratón y Temporizador**

**LP106**



# User Manual

## 1. Introduction

The wireless presenter is suitable for any presentation or PowerPoint occasion. With it, you don't need to stand beside your computer or have an assistant.

It combines the functions of a laser pointer, remote control, wireless mouse. It is tailored as a convenience tool for presentations, teaching, meeting, speeches and training.

This product contents: The transmitter and the USB receiver.

**Unique Features:**

■ **Easily control the pace of your presentation**
Enables you to control your presentation wirelessly up to 15 metres away (49 feet). Advanced radio frequency (RF) technology that works through walls.

■ **Unique time and vibration reminder**
More convenient for you. Reminds you when your allocated time is running out.

■ **Multifunctional presenter**
A multifunctional wireless remote control for PowerPoint presentations, with laser pointer, wireless mouse, clock and counter functions.

■ **Easy to use**
USB plug and play. No driver required.

■ **Power Saving design**
The LCD screen will enter sleep mode if no keys are pressed for 30 seconds. Press any key to resume.

## 2. Operating system

Windows 98/2000/ME/XP/Vista/7/8 , Linux and Mac OS.



## 3. Parts

**Transmitter Front View**

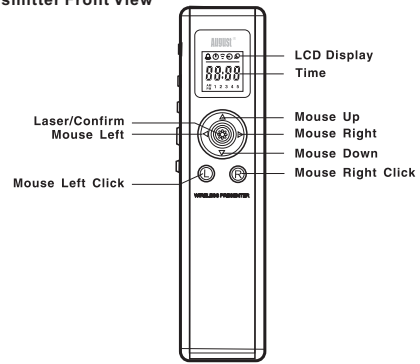


**Transmitter Side View**

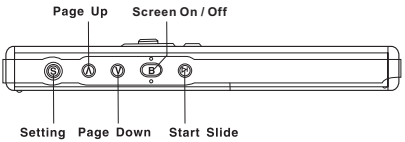


**USB Receiver**




English

## 4. Setup

Plug the receiver into the USB port on your PC.The system will automatically search for the new hardware and complete the setup.

## 5. Functions

- Laser pointer
- Page up/down
- Wireless mouse
- Powerpoint display and On/Off control
- Clock
- Self-determined timing alarm
- Fixed timing alarm
- Chronograph

## 6. Keys

| Key | Corresponding function | Operating condition |
|---|---|---|
| S | Setting | Any condition |
| Λ | Page up | Any condition |
| V | Page down | Any condition |
| B | Screen On / Off | PowerPoint |
| ⋈ | Start the slide show | PowerPoint |
| L | Left button of mouse | Any condition |
| R | Right button of mouse | Out of setting mode |
| △ | Mouse point move up | Any condition |
| ▽ | Mouse point move down | Any condition |
| ◁ | Mouse point move left | Any condition |
| ▷ | Mouse point move right | Any condition |
| ◎ | Red laser beam | Out of setting mode |
| ◎ | Save setting | Setting mode |



## 7. Settings

### 7.1 Alarm setting

1. Press 【◎】for 3 seconds, 【 🔔 】 will be flashing. Press 【 ◎ 】 the hour is flashing, push 【 ◎ 】 up or down to change the hour, push 【 ◎ 】left or right to go to the minute setting, push【 ◎ 】up or down to change the minute, press 【 ◎ 】 to save the setting and enter the clock setting.

2. It will remind the user by vibrating when it reaches the time set. Press R to stop, otherwise it will keep vibrating for 30 seconds.

3. If you don't want to set the alarm, when 【 🔔 】 is flashing, press 【 ◎ 】 twice to enter the clock setting.

### 7.2 Clock setting

1. When entering the clock setting, the time display is flashing, press 【 ◎ 】 , the hour is flashing, push 【 ◎ 】 up or down to change the hour, push【 ◎ 】 left or right to go to the minute setting, push 【 ◎ 】 up or down to change the minute, press 【 ◎ 】 to save the setting and exit.

2. If you don't want to set the time, when time display is flashing, press 【 ◎ 】 twice to exit the clock setting.

### 7.3 Fixed timing alarm

1. Press 【◎】 for 3 seconds, 【 ⏲ 】 and 【12345】 will display on the LCD screen. One of the numbers of 【12345】 is flashing, press 【 ◎ 】 to confirm if you want to choose it, and it will move to the next number and start flashing, press 【 ◎ 】 to confirm or push 【 ◎ 】 to the right to move to the next number.

2. It will exit automatically after all of the five settings are done.

**Note:**

【12345】 corresponds to timings of 3, 5, 10, 20 and 30 minutes respectively. (e.g. If the user set No. 1, 3, 5 at 11:00, then it will remind the user at 11:03, 11:10 and 11: 30).

### 7.4 Use of the chronograph

Press 【◎】 and 【◎】 together, 【⊖】 and 【00:00】 will display on the LCD screen. Press【◎】 one to start, press again to stop. Press 【◎】 to exit the setting.

Reading of the chronograph as below:

When using the chronograph, the fixed timing alarm setting will be deleted automatically.

## 8. Battery installation

- The unit is powered by 2xAAA batteries
- Remove the battery compartment cover
- Insert 2xAAA batteries into the battery holder
- Put the battery compartment cover back in position

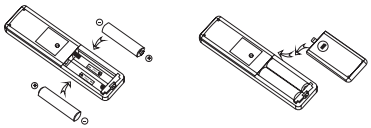

**Note:**

① Do not insert batteries into the presenter in the wrong direction.
② Do not leave bad or exhausted batteries in the presenter.
③ If you do not use the presenter for a long period of time, remove the batteries to avoid possible damage from battery corrosion.
④ If the presenter does not function correctly or if the operating range becomes reduced, try to replace the batteries with new one.



## 9. Technical parameters

| Transmitter | | USB Receiver | |
|---|---|---|---|
| Control Distance | 15 metres/49 feet | Operating Systerm | Windows 98/2000/ ME/XP/Vista/7, Linux and Mac OS |
| Technology | Radio Frequency | | |
| Frequency | 433.92MHz | Working Voltage | 4.5-5.5V |
| Working Voltage | 2.4-3.5V | Flash Memory | Optional |
| Sleep Current | 10uA | USB Version | USB1.1 compatible with USB 2.0 |
| Working Current | 50mA | Size | 73x26x14mm |
| Max Output | < 1mW | Weight | 16g |
| Laser Distance | 200m | | |
| Wavelength | 650nm | | |
| Battery | AAAx2 | | |
| Size | 123x30x14mm | | |
| Weight | 32g | | |

## Warning:

Laser radiation
Class 2 laser product
Do not view directly with optical instruments
Do not point at people and animals
Please keep out of reach of children

## Note:

Please note this instruction is only intended for reference. August International Ltd reserves rights to revise the product specifications, features and design without notice.